
ECOTWIST DAMSON

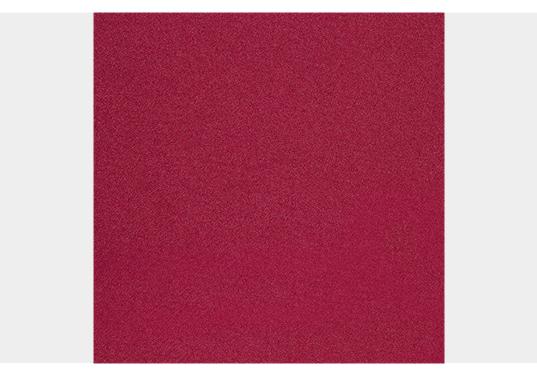

Images are for illustration purposes only, different screens will project different shades, please order your free sample to establish appropriateness of colour prior to order placement.

SKU: 507ECO1/481 | Categories: EcoTwist, EcoTwist |

Wash & Care Vacuum or wipe clean routinely with a microfibre cloth lightly dampened with cold water only. Soak up spillages as soon as possible with an absorbent dry cloth to prevent staining. If soiling has accumulated use a mild Proprietary cleaner (non-alkaline). Take care to remove all soap residues and dry with an absorbent cloth. Do not apply solvents, alcohol or any other chemical cleaners. Do not steam clean - heat seals in stains. Do not use bleach. Wash at 30°C / 86°F. Cool tumble dry Professional dry clean. Iron at maximum temperature 110°C / 230°F.

ADDITIONAL INFORMATION

Collection	EcoTwist
Flammability Ratings	BS 5852 IGN Source 5, BS 7175 IGN Source 5, BS 7176 Medium Hazard, CAL TB 117, EN 1021 1/2, NFPA 260
Design	<u>EcoTwist</u>
Colourway	481 Damson

Colour	Red
Product Type	Woven
End Use	Upholstery
Sector	<u>Hospitality</u> , <u>Workspace</u>
Material	Fire Retardant, Polyester, Recycled Polyester
Pattern Type	<u>Plain</u>
Width	Standard Width
Width (cm)	<u>140</u>
Weight (g/m2)	<u>315</u>
Martindale Scale	<u>80,001 - 100,000</u>
Martindale Abrasion	<u>90,000</u>
Wyzenbeek Scale	<u>0 - 50,000</u>
Wyzenbeek DR	<u>50,000</u>
LRV Scale	<u>0 - 10</u>
LRV	<u>3.5</u>
Sustainability	100% Recycled Materials, Recyclable
FR Territories	<u>UK</u> , <u>USA</u>
Colour Fastness	Colour Fastness to Light – Grade 6,Colour Fastness to Dry Rubbing – Grade 4-5,Colour Fastness to Wet Rubbing – Grade 4-5